




Black Hawk – get in the game

Capable of displaying Full HD images at 75Hz, the 27" Black Hawk G-MASTER GB2730HSU is the perfect companion in your gaming adventures. Armed with Black Tuner function and FreeSync Technology with a stunning 1ms response time, the Black Hawk guarantees you will see every tiny detail even in the shadowed screen areas and will be able to respond to the changing situation in an instant. The height adjustable stand with pivot, swivel and tilt functions allows you to perfectly adjust the position of the screen to your preferences. So get comfortable and get in the game!

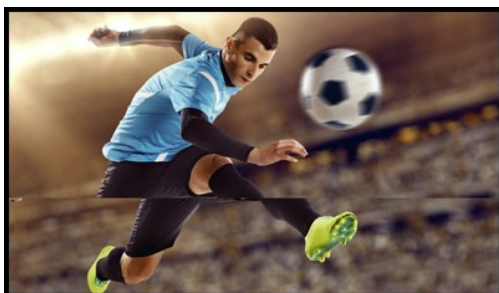

FreeSync™ Technology

AMD FreeSync™ technology puts an end to choppy gameplay and broken frames with fluid, artifact-free performance at virtually any framerate.



1ms

Fast response time is key to ultra-smooth gaming. It reduces ghosting and blurring providing the user with an improved graphic performance.

01 DISPLAY CHARACTERISTICS

| | |
|---------------------|---|
| Diagonal | 27", 68.6cm |
| Panel | TN LED, matte finish |
| Native resolution | 1920 x 1080 @75Hz (2.1 megapixel Full HD, HDMI&DisplayPort) |
| Aspect ratio | 16:9 |
| Panel brightness | 300 cd/m ² |
| Static contrast | 1000:1 |
| Advanced contrast | 80M:1 |
| Response time (GTG) | 1ms |
| Viewing zone | horizontal/vertical: 170°/160°, right/left: 85°/85°, up/down: 80°/80° |
| Colour support | 16.7mIn (sRGB: 99%; NTSC: 72%) |
| Horizontal Sync | 30 - 84kHz |
| Viewable area W x H | 597.6 x 336.15mm, 23.5 x 13.2" |
| Pixel pitch | 0.311mm |
| Colour | matte, black |

02 INTERFACES / CONNECTORS / CONTROLS

| | |
|---------------------|--|
| Signal input | VGA x1 (max. 1920 x 1080 @60Hz) HDMI x1 (v.1.4, max. 1920 x 1080 @75Hz) DisplayPort x1 (v.1.2, max. 1920 x 1080 @75Hz) |
| USB HUB | x2 (v.2.0 (DC5V, 500mA)) |
| HDCP | yes |
| Headphone connector | yes |

03 FEATURES

| | |
|-----------------------|--|
| Blue light reducer | yes |
| Flicker free | yes |
| Adaptive Sync support | HDMI & DP: 1920 x 1080 @40-75Hz |
| OSD languages | EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL |
| Control buttons | Power, Menu/ Select, Scroll up/ Volume, Scroll down/ ECO Mode, Exit, Input |
| User controls | auto adjust, picture adjust (contrast, brightness, OverDrive, ACR, ECO, Blue Light Reducer, Black Tuner, colour saturation, gamma), geometry (H. position, V. position, clock, phase), input select, audio adjust (volume, mute, audio input), colour settings (colour temp., user preset), miscellaneous (i-Style colour, sharp & soft, HDMI RGB range, video mode adjust, store user settings), language, setup menu (OSD H. position, OSD V. position, OSD time out, opening logo, FreeSync, display information), recall |
| Speakers | 2 x 2W |
| Convenience | Kensington-lock™ prepared, DDC2B, Mac OSX |

04 MECHANICAL


| | |
|------------------------------|--|
| Display position adjustments | height, pivot (rotation), swivel, tilt |
| Height adjustment | 150mm |
| Rotation (PIVOT function) | 90° |
| Swivel stand | 90°; 45° left; 45° right |
| Tilt angle | 23° up; 5° down |
| VESA mounting | 100 x 100mm |

| | |
|--------------------------------|---------------------------------|
| Cable management system | yes |
| 05 ACCESSORIES INCLUDED | |
| Cables | power, USB, HDMI |
| Other | quick start guide, safety guide |

| | |
|----------------------------|---|
| 06 POWER MANAGEMENT | |
| Power supply unit | internal |
| Power supply | AC 100 - 240V, 50/60Hz |
| Power usage | 19W typical, 0.5W stand by, 0.3W off mode |

| | |
|---|---|
| 07 SUSTAINABILITY | |
| Regulations | CE, TÜV-GS, EAC, RoHS support, ErP, WEEE, REACH, UKCA |
| Energy efficiency class (Regulation (EU) 2017/1369) | E |
| REACH SVHC | above 0.1%: Lead |

| | |
|-------------------------------|-------------------------------|
| 08 DIMENSIONS / WEIGHT | |
| Product dimensions W x H x D | 613.5 x 399.5 (549.5) x 252mm |
| Box dimensions W x H x D | 692 x 454 x 170mm |
| Weight (without box) | 6.4kg |
| Weight (with box) | 8.4kg |
| EAN code | 4948570121984 |

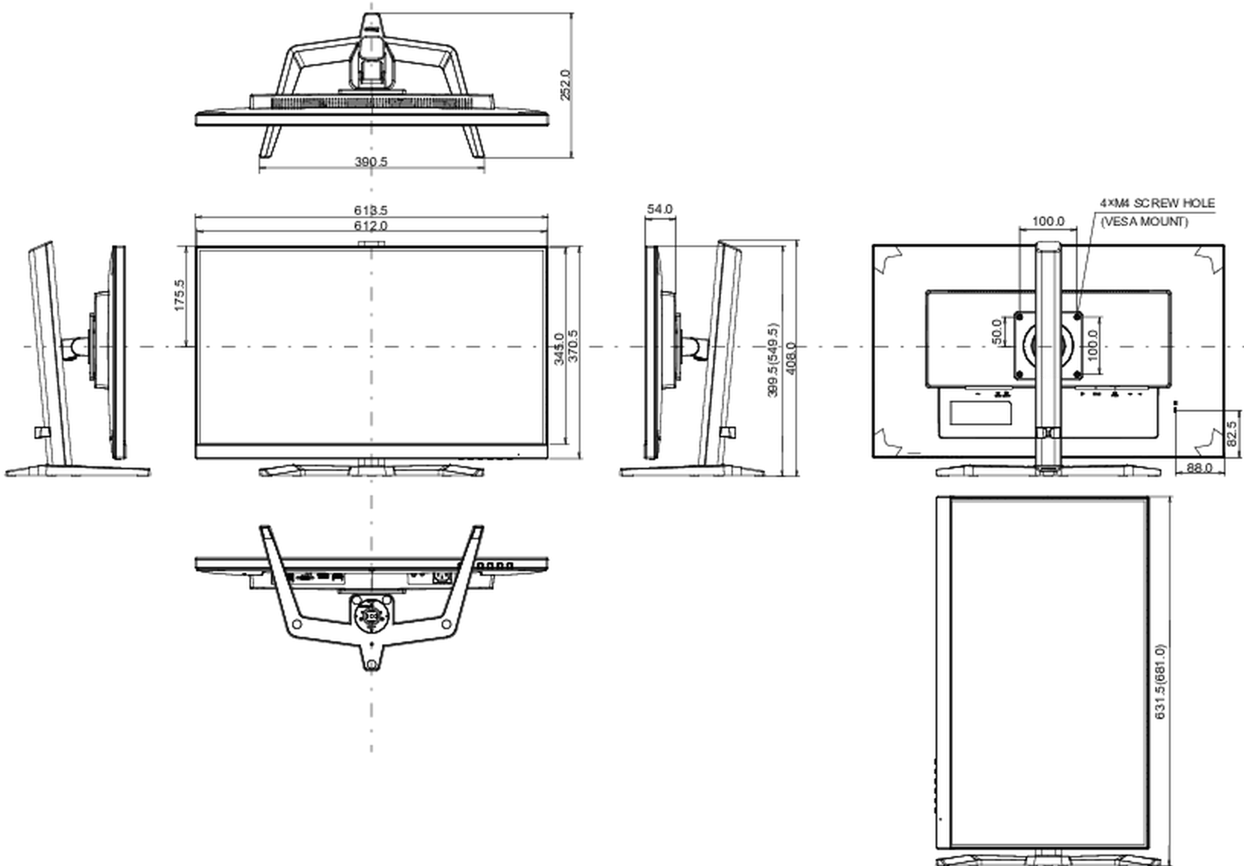

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED