



27" IPS technology panel featuring 4K resolution and Dynamic Power Saving (DPS)

The ProLite XU2792UHSU with its stylish front design and 4K resolution effortlessly accommodates four times more information than a Full HD display. Equipped with IPS panel for precise color reproduction and wide viewing angles, alongside high contrast and brightness values, it ensures impeccable performance for both photographic and web design tasks. With the Dynamic Power Saving (DPS) feature, simply toggle a switch to enjoy intelligent brightness adjustment for optimal energy efficiency without compromising on brilliance. Redefine your creative workflow with the ProLite XU2792UHSU.

K dispozici také s výškově nastavitelným stojanem: [ProLite_XUB2792QSU-B6 \(2560x1440\)](#), [ProLite_XUB2792HSU-B6 \(1920x1080\)](#) a [ProLite_XUB2792UHSU-B6 \(3840x2160\)](#).



Technologie IPS

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.

01 CHARAKTERISTIKA OBRAZU

Design	ultra slim
Úhlopříčka monitoru	27", 68.5cm
Panel	IPS LED s matnou povrchovou úpravou
Nativní rozlišení	3840 x 2160 @60Hz (DisplayPort, 8.3 megapixel 4K UHD)
Formát obrazu	16:9
Jas	350 cd/m ²
Kontrast	1300:1
Pokročilý kontrast	80M:1
Čas reakce (GTG)	4ms
Úhel sledování	horizontální/vertikální: 178°/178°, na parvo/na lefo: 89°/89°, nahoru/dolů: 89°/89°
Barevná podpora	1.07B 8bit (sRGB: 100%, NTSC 72%)
Horizontalfrequenz	30 - 140kHz
Arbeitsfläche H x B	596.7 x 335.7mm, 23.5 x 13.2"
Velikost bodů	0.155mm
Barva	matná, černá

02 ROZHRANÍ / KONEKTORY / OVLÁDÁNÍ

Vstupní porty	HDMI x1 (v.2.0) DisplayPort x1 (v.1.2)
USB HUB	x4 (3x Type A (v.3.2 Gen 1 (5Gbit; 4.5W), 1x Type C (PD 15W))
HDCP	ano
Konektor pro sluchátka	ano

03 VLASTNOSTI

Redukce modrého světla	ano
Flicker Free LED	ano
Jazyky OSD	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL
Kontrolní tlačítka	Joystick: Center (Power/Menu), Up (Input Select), Down, Right (Volume/Mute), Left (Submenu)
Nastavitelné parametry	picture adjust (brightness, contrast, ECO, ACR, OD, X-Res technology, DPS), colour settings (6-axis, i-Style colour, blue light reducer, gamma, RGB range, colour temperature, user preset), OSD (OSD H. position, OSD V. position, OSD time, OSD background, DDC/CI, display information), language, recall, miscellaneous (sharp and soft, video mode adjust, opening logo, LED, USB BC), input select (source) audio settings (volume, mute)
Reproduktory	2 x 2W
Výhoda	Kensington-lock™ připraven, DDC2B, Mac OSX

04 MECHANICKÉ ČÁSTI

Úpravy polohy	náklon
Úhel náklonu	20° nahoru; 4° dolů
VESA	100 x 100mm
Systém správy kabelů	ano

05 ZAHRNUTÉ PŘÍSLUŠENSTVÍ

Kabely	napájecí, USB, HDMI, DP
--------	-------------------------

Ostatní

uživatelský manuál, instrukce bezpečnosti

06 POWER-MANAGEMENT

Napájecí zdroj:

interní

Napájení

AC 100 - 240V, 50/60Hz

Odběr energie:

34W typisch, 0.5W odpočinek, 0.3W vypnutý

07 UDRŽITELNOST

Předpisy

TCO Certified, CE, TÜV-GS, EAC, PSE, RoHS support, ErP, WEEE, VCCI, REACH, UKCA

Energetická třída (Regulation (EU) 2017/1369)

F

EPEAT Silver

*registration varies by country, go to www.epeat.net for details

REACH SVHC

nad 0.1% olova

08 ROZMĚRY / HMOTNOST

Rozměry výrobku Š x V x D

614.5 x 439.5 x 190mm

Rozměry balení Š x V x D

688 x 473 x 124mm

Váha (bez balení)


4.7kg

Váha (s balením)

7.1kg

EAN code

4948570123797

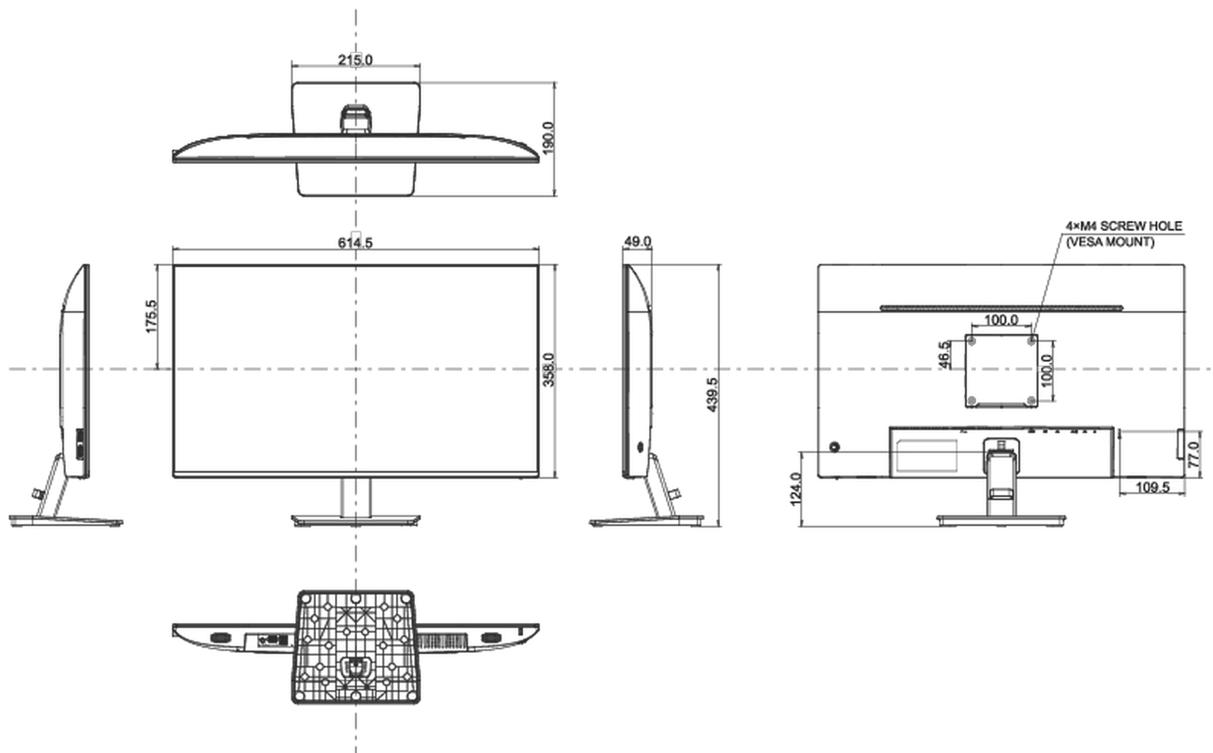

Všechny ochranné známky jsou registrovány a chráněny. Vyhrazené právo na změny. Veškeré ploché panely LCD splňují normu ISO-9241-307:2008 v oblasti počtu vadných pixelů.

