



**All-in-one PCAP Interactive Display inspired by technology and designed for creative spaces and sharing.**

Enjoy an all-in-one interactive display that combines the best in PCAP Touchscreen technology, offering the versatility and freedom of Android OS, easily customized to your needs by installing applications directly to it. Offering a powerful, yet flexible user experience, fostering creative communication with the benefits of a secure and controllable Touchscreen.

The refined design of the T5562AS-B1 lends itself for integration into a large variety of environments where polished design and functionality are needed, like Huddle spaces in the modern office space, Retail shops and Kiosks.

With the [EShare app](#) you bring effortless ideation and efficient collaboration in your enterprise or school. You can start sharing wirelessly easier than ever before.



The interactive 4K Touchscreens are the key for immersive interactive experiences for spatial retail design. Allow customers to explore your website right there and then or engage with a range of creative or experiential applications you want to host. The flexibility of either landscape or portrait modes with 24/7 Operation, built-in Android and MediaPlayer make this SERIES displays one of the most adaptable Touchscreens solutions around.

**Huddle Spaces**

## 01 CHARAKTERISTIKA OBRAZU

Úhlopříčka monitoru	54.6", 138.8cm
Panel	VA, AG Coating
Nativní rozlišení	3840 x 2160 (8.3 MegaPixels 4K UHD)
Formát obrazu	16:9
Jas	500 cd/m <sup>2</sup>
Propustnost světla	80%
Kontrast	5000:1
Čas reakce (GTG)	8ms
Úhel sledování	horizontální/vertikální: 178°/178°, na parvo/na lefo: 89°/89°, nahoru/dolů: 89°/89°
Barevná podpora	1.07G (8 Bits+FRC) (NTSC 72%)
Horizontalfrequenz	30 - 135kHz
Arbeitsfläche H x B	1209.6 x 680.4mm, 47.6 x 26.8"
Velikost bodů	0.315mm
Barva rámečku	černá, matná

## 02 DOTYK

Touchscreen Technologie	bonded PCAP
Touchpunkte	20
Metoda dotyku	prst, rukavice
Touch interface	USB
Podporované OS	Compatible with Windows 10/11 and Linux (Kernel 3.0 and higher). MacOS not supported.
Palm odmítnutí	ano

## 03 ROZHRANÍ / KONEKTORY / OVLÁDÁNÍ

Digitální vstupní porty	HDMI x3 (3480x2160@60Hz)
Řídící vstup monitoru	RS-232c x1 RJ45 (LAN) x1 IR x1 (3.5mm stereo mini)
Audio Out	Reproduktory 2 x 10W
Řídící výstup monitoru	IR smyčka x1 (3.5mm stereo mini)
HDCP	2.2
USB ports	x2 (2.0 with Multimedia supp.)
RS-232c	x1

## 04 VLASTNOSTI

Integrovaný software	Android 8.0, Signal FailOver
CPU	CA73*2 + A53*2
GPU	MALI G51
Storage	16GB eMMC
Memory	2GB RAM + 1GB Embedded
Extra	Micro SD card slot
Kiosk Mode	ano
Max. provozní doba	24/7

Anti image retention	ano
Tloušťka skla	2.5mm
Tvrdoost skla	6H

## 05 OBECNÉ

Jazyky OSD	EN, DE, FR, ES, RU, JP, NL, PL
Kontrolní tlačítka	Power, Mute, Input select, +, -, Up, Down, Menu
Nastavitelné parametry	picture (brightness, contrast, sharpness, black level, tint, colour, noise reduction gamma selection, colour temp., colour control, smart power, overscan, reset), screen (zoom mode, custom zoom, reset), audio (balance, treble, bass, volume, max. volume, min. volume, mute, reset), configuration1 (switch on state, panel saving, RS32-routing, boot on source, WOL, RGB range, reset, factory reset), configuration2 (OSD turn off, OSD H position, OSD V position, system rotation, information OSD, logo, monitor ID, heat status, monitor info, HDMI version, reset), advanced option (IR control, power LED light, keyboard control, off timer, date and time, schedule, HDMI with One Wire, auto signal detection, language, OSD transparency, power save, reset), Android settings, display mode

## 06 MECHANICKÉ ČÁSTI

Orientace	horizontální, vertikální
VESA	400 x 400mm
Rozsah provozní teploty	0°C - 40°C
Rozsah provozní teploty (-°/+°)	-20°C - 60°C
MTBF	50000 hours (bez podsvícení)

## 07 ZAHRNUTÉ PŘÍSLUŠENSTVÍ

Kabely	napájecí, USB, HDMI, RS-232c
Příručky	uživatelský manuál, instrukce bezpečnosti
Dálkové ovládání	ano (včetně baterie)

## 08 POWER-MANAGEMENT

Napájecí zdroj:	interní
Napájení	AC 100 - 240V, 50/60Hz
Odběr energie:	150W typisch, 1.5W odpočinek, 0.3W vypnutý

## 09 UDRŽITELNOST

Předpisy	CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH
REACH SVHC	nad 0.1% olova


## 10 ROZMĚRY / HMOTNOST

Rozměry výrobku Š x V x D	1264.4 x 734.9 x 65.8mm
Rozměry balení Š x V x D	1410 x 891 x 203mm
Váha (bez balení)	23.4kg
Váha (s balením)	29.8kg
EAN code	4948570120475

# PROLITE T5562AS-B1

Version: 2.0

Release date: 2022/05/04

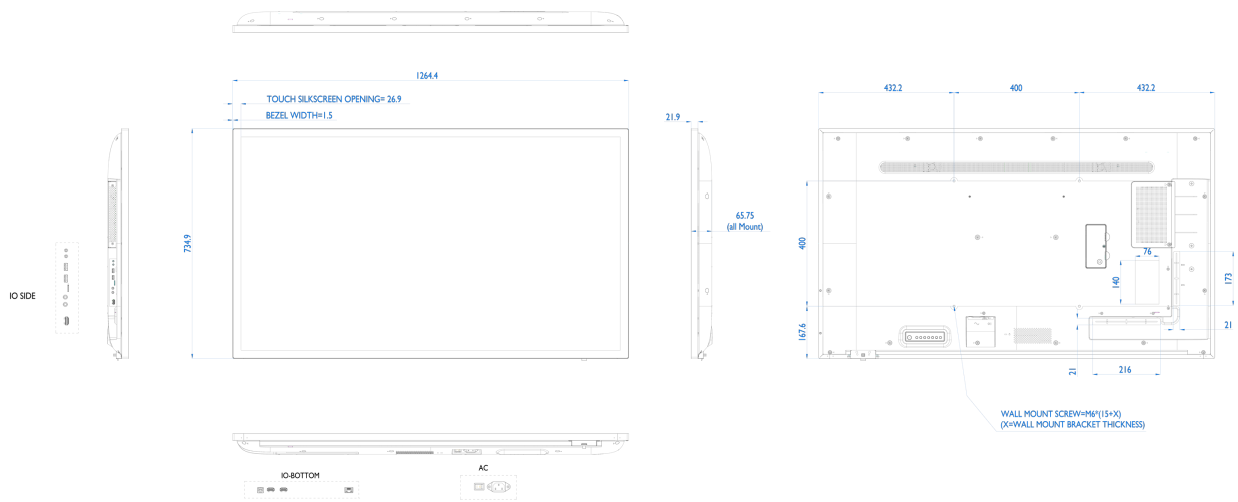

Všechny ochranné známky jsou registrovány a chráněny. Vyhrazené právo na změny. Veškeré ploché panely LCD splňují normu ISO-9241-307:2008 v oblasti počtu vadných pixelů.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED