

### 65" Interactive 4K LCD Touchscreen with integrated annotation software

Share Your Vision with the ProLite TE6504MIS-B1AG; a perfect solution for educational and corporate use. Its 65" PureTouch-IR 20-point touchscreen with iiWare 9.0 (Android OS) featuring Note, web browser, file manager, cloud drives, WPS office and ScreenSharePro. It comes with dual function touch pens, allowing users to annotate easily in 4K on files and on-screen content which can be saved directly to a USB device, 32GB internal memory or a selected cloud drive. The display supports playback of presentations, high-resolution video and almost any other type of content. Now with additional USB-C connection to support the latest in video, audio and touch signal via a single port and even charge your device with 65W power delivery.

The high-quality commercial IPS LCD screen with a 4K UHD resolution (3840x2160), 400cd/m<sup>2</sup> and a contrast ratio of 1200:1 provide vibrant, detailed and high-quality images from anywhere in the class or meeting room. The anti-glare coating drastically reduces ambient reflection in high-brightness environments without compromising the sharpness and clarity of the image. The screen has a 24/7 non-stop operating time and is equipped with an all-metal bezel, 3mm thick hardened glass to ensure robust durability in high-use environments such as classrooms or meeting rooms.

Share, stream and edit content from any device directly on screen and transform your team meetings or lessons into an easy, fast and seamless interactive session with the included WiFi module ([OWM002](#)), ScreenSharePro and EShare app.



PureTouch-IR

PureTouch-IR from iiyama delivers 1mm touch accuracy for the smoothest and fastest annotation.



iiWare

iiWare 9.0 features Note, Browser, Cloud Drive and the option for you to sideload relevant apps you require for your organisation.

## 01 DISPLAY CHARACTERISTICS

Design	Thin bezel
Diagonal	65", 163.9cm
Panel	IPS, AG coated glass, zero air-gap
Native resolution	3840 x 2160 (8.3 megapixel 4K UHD)
Aspect ratio	16:9
Panel brightness	400 cd/m <sup>2</sup>
Light transmittance	88%
Static contrast	1200:1
Dynamic contrast	3500:1
Response time (GTG)	8ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	1.07B 8bit+FRC
Horizontal Sync	30 - 80kHz
Viewable area W x H	1429 x 804mm, 56.3 x 31.7"
Bezel width (sides, top, bottom)	14mm, 14mm, 43mm
Pixel pitch	0.372mm
Bezel colour and finish	black, matte

## 02 TOUCH

Touch technology	PureTouch-IR
Touch points	20 (HID, only with supported OS)
Touch accuracy	+/- 1mm
Touch method	stylus, finger, glove
Touch interface	USB
Supported operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.

## 03 INTERFACES / CONNECTORS / CONTROLS

Analog signal input	VGA x1 (max. 1920x1080 @60Hz)
Digital signal input	HDMI x3 (v.2.0, max. 3840x2160 @60Hz, RGB444) USB-C x1 (3.1, 3840x2160 @60Hz - RGB444 - (65W charging, Touch)
Audio input	Mini jack x1
Monitor control input	RS-232c x1 (DSUB 9pin) RJ45 (LAN) x1 (LAN Control)
Digital signal output	HDMI x1 (2.0, 3840x2160 @60Hz - RGB444/YUV444)
Audio output	S/PDIF (Optical) x1 Mini jack x1 Speakers 2 x 16W
HDCP	v.2.2
USB ports	x5 (media playback / peripherals / storage – front side: 2x v.3.0, right side: 2x v.3.0, 1x USB-C v.3.1)
RJ45 (LAN)	x2 (Auto switch for PC & Android, 1000MB)

## 04 FEATURES

<b>Integrated software</b>	iiWare 9.0 (Android OS) featuring Note, web browser, file manager, cloud drives, WPS office, ScreenSharePro and EShare for wireless connection with Windows/iOS/Android devices
<b>WiFi</b>	yes (WiFi Module OWM002 - Dual WiFi Bandwidth: 2.4GHz/5GHz, WiFi Standard: IEEE 802.11 a/b/g/n/ac, Bluetooth Support: 2.1/3.0/4.2/5.0)
<b>Hardware</b>	Quad core A73 CPU, Mali G52 GPU, 4GB RAM, 32GB internal memory
<b>Extra</b>	Ambient light sensor, OTA firmware update
<b>Kiosk mode</b>	yes
<b>Max. non-stop operating time</b>	24/7
<b>Media playback</b>	yes
<b>Glass thickness</b>	3mm
<b>Glass hardness</b>	7H
<b>Housing (bezel)</b>	metal
<b>OSD key lock</b>	yes

## 05 GENERAL

<b>OSD languages</b>	EN, DE, FR, ES, IT, RU, CZ, NL, PL
<b>Control buttons</b>	Power, Power Indicator, Remote Sensor, Light Sensor, USB Connector (3.0)
<b>User controls</b>	common settings (input, volume, backlight), audio settings (volume, bass, treble, balance, sound mode, mute), screen settings (aspect ratio, pixel shift, eye care, auto light, ECO, ECR), display settings (brightness, contrast, hue, sharpness, display mode, colour temp.), adjust settings (H-position, V-position, clock, phase, auto), settings (wireless & networks, personal, input & output, application, system)
<b>Plug&amp;Play</b>	DDC2B
<b>Warranty</b>	5 years (for details and eligible countries please check the Warranty section of our website)

## 06 MECHANICAL

<b>Orientation</b>	landscape
<b>Fanless design</b>	yes
<b>VESA mounting</b>	600 x 400mm
<b>Operation temperature range</b>	0°C - 40°C
<b>Storage temperature range</b>	- 20°C - 60°C
<b>MTBF</b>	50.000 hours (excluding backlight)

## 07 ACCESSORIES INCLUDED

<b>Cables</b>	power, HDMI, USB for Touch
<b>Touch pen</b>	x4 (Dual function tips)
<b>Guides</b>	quick start guide, safety guide
<b>Other</b>	WiFi Module (OWM002), Mounting bracket for NUC, Mounting bracket for webcam
<b>Remote control</b>	yes (batteries included)

## 08 POWER MANAGEMENT

<b>Power supply unit</b>	internal
<b>Power supply</b>	AC 100 - 240V, 50/60Hz
<b>Power usage</b>	190W typical, 0.5W stand by, 0.5W off mode

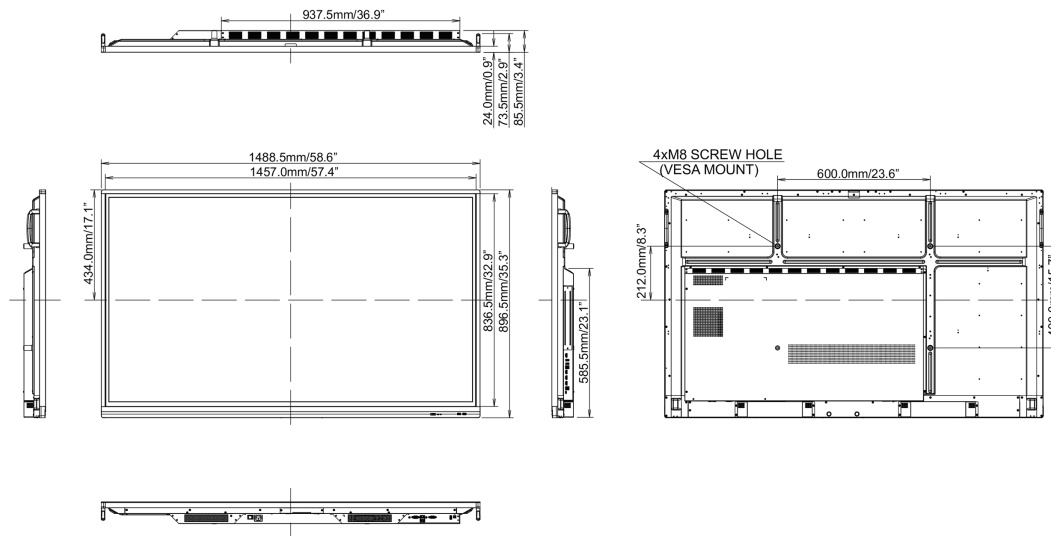
## 09 SUSTAINABILITY

**Regulations**

CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH (RoHS, PFOS, PFC)

**REACH SVHC**

above 0.1%: Lead

**10 DIMENSIONS / WEIGHT****Product dimensions W x H x D** 1489 x 897 x 86mm**Box dimensions W x H x D** 1697 x 220 x 1005mm**Weight (without box)** 38kg**Weight (with box)** 50kg**EAN code** 4948570118434

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED